


CSA-ATEX APPROVED INTRINSICALLY SAFE TRANSMITTERS & ZONE 2 RATED DISPLAYS



CSA-ATEX approved, Intrinsically Safe transmitters and Zone 2 rated Displays.

- Does your product application require explosion proof sensors? If you do, then look to LSI as your solution provider.
- Each of our transmitters can be supplied with either CSA-US, Class 1 Div 1 approval or ATEX Zone 0, 1, 2 approvals. We offer intrinsically safe loads cell, A2B, boom angle and wind speed, as well as standalone transmitters to transmit on/off, pressure, temperature, and strain gauge signals.
- We offer a CSA-US, Class 1 Div 2 approved display with either our GS550 Display or GS820 display. The housing on these displays is also available in stainless steel. Our ATEX displays are rated for a safe cab.
- Our transmitters are powered from a "D" cell lithium battery. The electronics inside of our transmitter boxes are potted for increased water proof protection.
- LSI products feature a 2 year warranty against defects.
- If you are in need of intrinsically safe sensors I would encourage you to call LSI today to learn more about a market leading products.

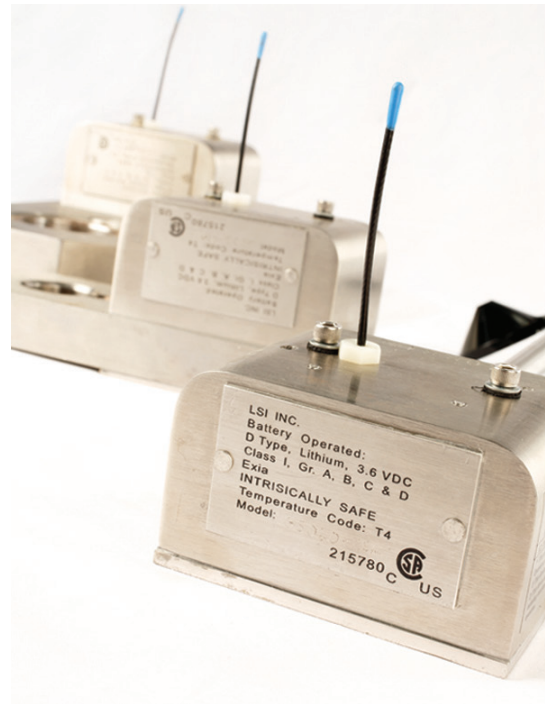

Load Systems International

USA CORPORATE OFFICE

9633 Zaka Road
Houston, TX 77064

Toll Free Phone: 888.819.4355

Direct Phone: 281.664.1330

Toll Free Fax: 888.238.4099

Direct Fax: 281.664.1390

Email: sales@loadsystems.com

Web: loadsystems.com